


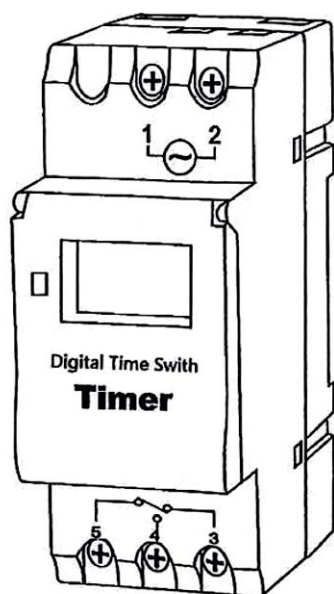

DIN Rail Installation

Advanced pre-setting one week before

Digital electronic time switch with daily programs

Repeat programs with 16 on/off setting; and manual over-ride

Lithium battery power reserve

Auto time error correction $\pm 60\text{sec}$, weekly

TECHNICAL DATA

Voltage rating: AC220V 50/60Hz

Voltage limit: AC 180V~250V

Hysteresis: $\leq 1\text{ sec/day}(25^\circ\text{C})$

ON/OFF operation: 16ON & 16OFF

Power consumption: 2VA(max)

Display: LCD

Service life: Mechanical 10^7

Electrically 10^5

Minimum interval: 1 minute

Weight: approx 120g

Order Voltage

12V, 24V, 36V, 48V, 110V;

Count down: 1min-168hour

Pulse: 1min-168hour

Load capacity: resistive load: 16A/250VAC

Lagging load: 10A/250VAC

lamp load: 2000W

Switching contact: 1 changeover switch

Power reserve: 3 years (Lithium battery)

Ambient temperature: $-10\sim+40^\circ\text{C}$


Ambient humidity: 35~85%RH

DISPLAY



1	⊙	TIMER
2	D+	DAY
3	H+	HOUR
4	M+	MIN
5	⊙	CLOCK
6	C	RESET
7	MANUAL	MANUAL C/R

MEANING.

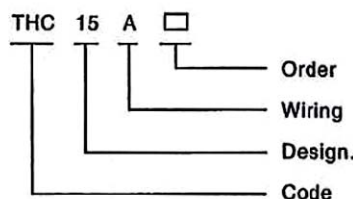

Operating Instruction:

1. To start switch: press reset Key, At the first time, if you want to the present time, please press "⊙" on Board, then press D+, H+, M+ to adjust the number to the present time.
2. Enter into programming as follows:


Step	Key	Programming
1	Press P	Setting 1 ON time (display 1 on)
2	Press H+/M+	Setting hours and minutes
3	Press D+	To select same every day, different time each day
4	Press P	Setting 1 off time (display 1 off)
5	Press H+/M+	Setting hours and minutes turn off time
6	Press D+	If you want the same every day, you need not press this key
7	Repeat step 2-6	ser 2-16 on/off time
8	Press ⊙	End

If you do not require 16 settings, press "⊙" to the end.


NOTE:

1. Time setting should according to the time sequence, couldn't be set crossly
2. System with quit automatically if there's no operating within 10 seconds and no data is saved
3. Function 3, 4, 5 can not be used simultaneously.

CONNECTION DIAGRAM

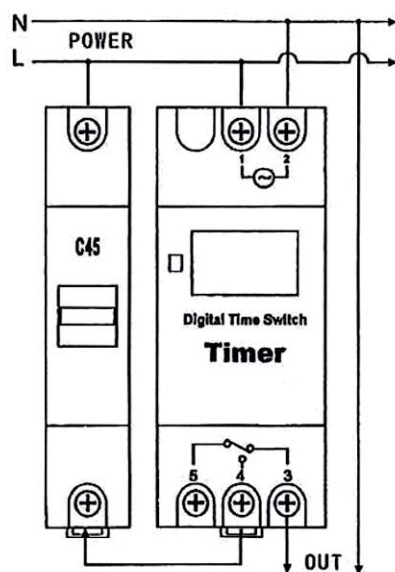

DIMENSIONS

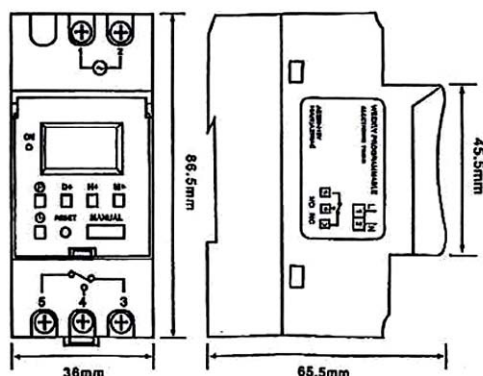

DAY HARI	ENG	BM	CHI	PROGRAMMABLE DAYS PROGRAM HARI 编程天数	
1	Mo	Is	一	1 - 7	1
2	Tu	Se	二	1 - 6	2
3	We	Ra	三	1 - 5	3
4	Th	Kh	四	6 & 7	4
5	Fr	Ju	五	1, 3 & 5	5
6	Sa	Sa	六	2, 4 & 6	6
7	Su	Ah	日	1 - 3	7
				4 - 6	

ENGLISH

- A) PRESS AND HOLD  AND PRESS D+. H+ AND M+ TO SET DAY AND TIME
 B) PRESS P. LCD SHOWS 1on
 C) PRESS D+ TO SET PROGRAMMABLE DAYS REQUIRED (TABLE ABOVE)
 D) PRESS H+, M+ TO SET FOR 1on
 E) PRESS P. LCD SHOWS 1off
 F) PRESS H+, M+ FOR 1off
 G) REPEAT STEPS (B) TO (F) FOR UP TO 17 POSITIONS 'ON' AND 'OFF' SETTINGS

BM

- A) TEKAN  D+ H+ DAN M+ BAGI TETAPAN HARI DAN MASA.
 B) TEKAN P. LCD MENUNJUKAN 1on
 C) TEKAN D+ TETAPKAN HARI PROGRAM DI PERLUKAN (RUJUK JADUAL DIATAS)
 D) TEKAN H+, M+ UNTUK SET 1on
 E) TEKAN P, LCD MENUNJUKAN 1off.
 F) TEKAN H+, M+ UNTUK 1off
 G) ULANG LANGKAH (B) SAMPAI (F) UNTUK 17 KEDUUKAN 'ON' DAN 'OFF'

CHINESE

- A) 按住  按D+, H+ 和 M+ 来设定日期和时间
 B) 按P, LCD 显示 1on
 C) 按D+ 设定所需的编程天数 (如上图)
 D) 按H+, M+ 为设置 1on
 E) 按P, LCD 显示 1off
 F) 按H+, M+ 为 1off
 G) 重复步骤(B)和(F), 以设置'ON'和'OFF'长达17个职位